

## Husemann & Hücking Profile GmbH

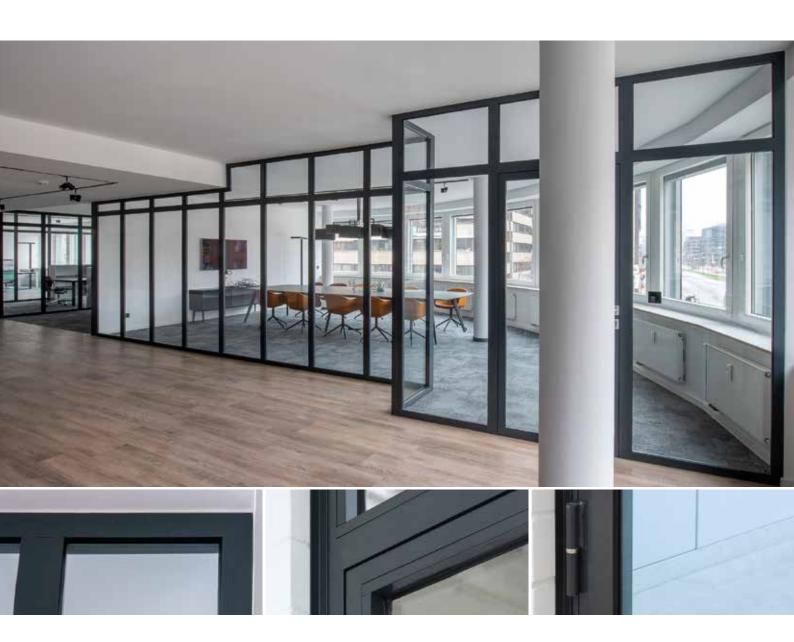


stable, lasting value, sustainable, transparent the WP 50 cold door and partition wall system

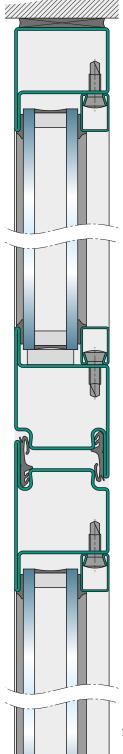


# The WP 50 cold door system


- WP 50 cold offers a wide range of applications and high functionality
- The narrow face widths allow for transparent door elements in an attractive design
- Flush 1- and 2-leaf door constructions or fixed glazing can be realized in different dimensions
- WP 50 cold offers consistent stability even for large door elements and the security of a permanent fit for the door hinges
- The material steel is particularly impact-resistant, highly resistant, dimensionally stable and extraordinarily durable.
- Steel is 100% recyclable and particularly environmentally friendly
- Steel offers more security against burglary and vandalism than any other material
- With the clipped glazing bead system and coordinated gaskets, various glass thicknesses are possible
- WP 50 cold profiles and glazing beads are supplied in a processing-friendly length of 6600 mm.
- The steel profiles are supplied with either a bright or strip galvanized surface.
- WP 50 cold is tested according to EN 14531-1.





Section A – A

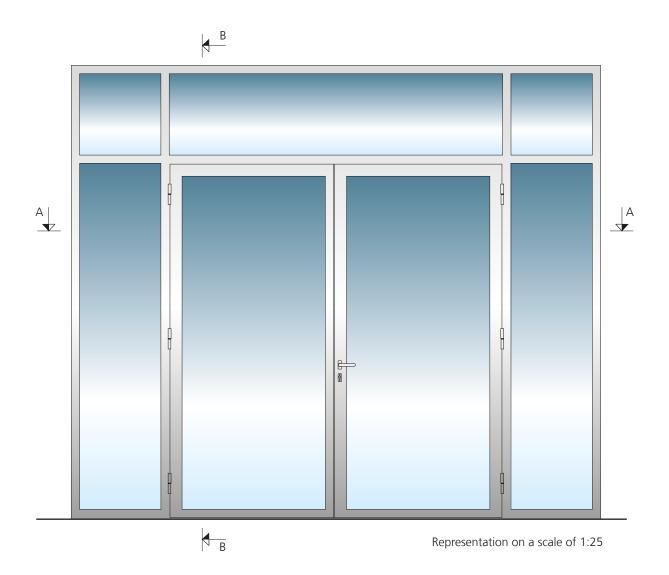


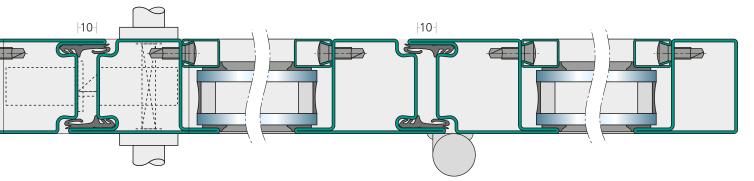



All dimensions in mm, representation on a scale of 1:2


### Husemann & Hücking Profile GmbH

### WP 50 cold system profiles











WP 951101 strip galvanized



WP 9510112 strip galvanized



WP 9510121 strip galvanized

Glazing beads, steel (surface strip galvanized)



WP 9102115



WP 9102120



WP 9102125



∑ **\_\_\_\_\_ \_\_\_** WP 9102135

35

**Clamping screws** 



WP 905002

WP 905003


Clamping screw, 10 pieces magazined

Stop seal



WP 905004

### **Fittings**



Weld-on band height adjustable

27,5

905019

Template for weld-on band

